

8800 SERIES

A. Universal Concealed Transom Closer

- Adjustable closing speed
- Adjustable latching action
- Progressive mechanical backcheck

B. End load top arm & channel

C. Standard top arm & channel

D. Standard Arm 'T' option

E. Universal bottom pivot

| DOOR WIDTH | CLOSER SIZE | CLOSING FORCE in NM (kpm) | PRODUCT CODE | | |
|---------------|-------------|------------------------------|--------------|---------------|----------------|
| | | | NO HOLD | HOLD OPEN 90° | HOLD OPEN 150° |
| Up to 750mm | 1 | 20 (2:0) | 8801-00 | 8801-90 | 8801-105 |
| 751 to 950mm | 2 | 27 (2:7) | 8802-00 | 8802-90 | 8802-105 |
| 951 to 1150mm | 3 | 33 (3:3) | 8803-00 | 8803-90 | 8803-105 |

ARC-51 N

Overhead Concealed Door
Closer and 'Springless' Pivot



TS93

Cam Action Slide Arm Overhead Door Closer

- Backcheck & delayed action to suit pull side door & push side transom fixing.
- Adjustable closing speed
- Adjustable latching action
- Adjustable backcheck

BT575V

Universal Floor Spring Unit and Cement Box with Backcheck

- Adjustable closing speeds
- Adjustable latching action
- Integrated mechanical backcheck



TS83

Multi-Strength Surface Mounted Closer

- Universal door closer with backcheck & delayed action.
- Adjustable closing speed & latching action. Self-adjusting backcheck.

Locks



**1890
Latch/Dead lock**
Retractable hooklock and latchbolt for unrestricted access.
Handle operates the latch for exit only traffic.
Hookbolt for maximum security locking.
Steel with aluminium face plate.



**4710
Heavy Duty Dead latch**
Mechanical access control.
Dead latch function for enhanced security.
Steel with aluminium face plate.

**4750
Heavy Duty Dead latch**
Function identical to CM3116
Operates using a 17mm europrofile cylinder/
thumbturn or CM3118 paddle handle - Silver.



**2200 SERIES
Hook lock**
Armoured Strike c/w
Trim Strike & Cylinder Escutcheon - Silver.



**1850
Hook lock**
Armoured Strike c/w
Trim Strike & Cylinder Guard - Silver.



**2600
Sentinel 6 Deadlock**
Adams Rite Hook Lock
Engineered Specifically to meet BSEN 12209
Grade 6

9600 SERIES
Nemef Narrow Style Sashlock
For Aluminium Doors



0400 SERIES
Codelock Narrow Style Mechanical
Digital Door Lock



Accessories



**Round Mortice
Cylinders & Turn**
For use with dead
latches and hook
locks which accept
round screw-in
mortice cylinder.



**Europrofile Double
Cylinders &
Cylinder T/Turn**
For use with Dead latches
& Hook locks which accept
Europrofile Cylinders.



Escutcheons
For Europrofile cylinders.
Self Adhesive &
Screw Fixed
SAA

Electric Strike
12 or 24V Fail Safe
or Fail Secure



**Aluminium Sleeved
Letter Plate**
With inner tidy



Flush bolt
For securing the
inactive leaf of a pair
of doors.



Panic Hardware



**7085
Panic Exit Device**
Concealed vertical rod for aluminium doors with steel locking rods adjustable in length, for a wide range of door stiles.



**7085P
Panic Exit Device**
Aluminium push paddle handle. Concealed plated steel locking rods. Emergency exit for hollow stile doors.

**7100
Touch Push Bar**
Concealed plated steel locking rods. Emergency exit for hollow stile doors.



**4592/6
Paddle Handle**
Designed for narrow stile hollow metal and timber doors. Can be fitted to either side of the door and a standard rim. Cylinder can be fitted to the reverse side for access.



**PH350 SERIES
Single Point Panic Latch**
Reversible



**PH352
Single Point Push Pad
Exit Latch**
Reversible

**500 SERIES
3 Point Panic Bolt**



**500 SERIES
Push Pad 3 Point Panic Bolt**



Patch Fittings



Universal Patch Fittings
Broad spectrum of types and variants
Can be supplied with various fixed parts including with corner fittings or fin fittings at different angles,
With double or single action doors in single-leaf or double-leaf designs.



Patch Fittings - offers offset hinges that allow single action doors to be fitted with or without a rebated frame.

Glass thickness: 8, 10 or 12mm
Rebated frames with 24mm frame stop depth - Max door weight: 75kg,
Max door width: 1000mm
Without rebate - Max door weight 80kg,
Max door width: 1100mm

Fixed Panels & Pivots
Maximum protection for the edges of tempered glass.
For use in high traffic places & with wider, higher, heavier door/panels than usual. For 10 and 12 mm tempered or plated glass



Patch Locks
Simple glass preparation
firm fixing



Handles




**Cranked Pull Handle
Nylon**

250mm c/c
300mm c/c

**Semi-Circular Pull Handle
Nylon**

300mm c/c
400mm c/c

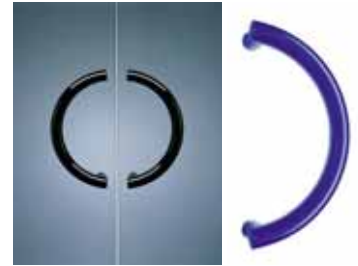

**Cranked Pull Handle
Stainless Steel**

250mm c/c
300mm c/c



**Semi-Circular Pull Handle
Stainless Steel**

300mm c/c
400mm c/c



Triangular Cranked Pull Handle

Nylon & Stainless Steel
300mm c/c

**Pad Handle Set for Commercial
Aluminium Doors**

Satin Anodised Aluminium & Mill Finish
230 x 113mm



Straight Pull Handle

Nylon & Stainless Steel
250mm c/c
300mm c/c



"T" Bar Type Pull Handle

Nylon & Stainless Steel
300mm c/c
450mm c/c
600mm c/c



**Nylon Solid Semi-Circular
Cranked Pull Handle**

210mm c/c

**Full Height Tubular Handle for use with
Aluminium, Steel & Solid Timber Doors.**

Overall size 2500mm x 40mm dia.
Stainless Steel Satin Anodised Aluminium &
Mill Finish



Additional Services

- Dorma Automatics
- Barrier Rails
- Finger Protectors
- Highline Window Gear
- Access Controls
- Solenoid Locks
- Special Pull Handles
- Magnetic Locks